

nexstyle
bath

DELUXE CERAMIC PEDESTAL SINK



INSTALLATION GUIDE AND USER MANUAL

Itm./Art. 734290
Model No. 4SHH001WHI
(QCSHH7001/7002)

ATTENTION

**BEFORE BEGINNING INSTALLATION, READ ALL INSTRUCTIONS FIRST.
SAVE THESE INSTRUCTIONS FOR FUTURE USE.**

CAREFULLY CHECK THE PRODUCT AND ITS COMPONENTS FOR DAMAGE PRIOR TO INSTALLATION. IF THERE IS ANY DAMAGE OR IF YOU ARE MISSING PARTS, PLEASE CALL CUSTOMER SERVICE TOLL FREE AT 1-800-459-4409 (MONDAY TO FRIDAY, 8:30 AM TO 5:00 PM, EST).

DO NOT RETURN TO THE PLACE OF PURCHASE BEFORE CALLING THE TOLL FREE NUMBER. DO NOT DISPOSE OF PACKAGING UNTIL YOU ARE SATISFIED WITH YOUR NEW PEDESTAL SINK.

WARNING: Always wear safety goggles and gloves during installation to prevent personal injury.

CAUTION: Ceramic pedestal sinks are fragile and can break, chip or cause personal injury if handled carelessly. Please handle your new sink with extra care during installation. Once the sink is removed from the packaging, always ensure that it is placed on a soft surface such as a towel or blanket before installation.

CAUTION: This pedestal sink is heavy. Get help lifting and moving it, if necessary.

CAUTION: Do not overtighten connections. Overtightening may break or chip the pedestal sink.

BEFORE YOU BEGIN

Observe all local plumbing and building codes. Have a qualified tradesman do or approve your plumbing installation.

These instructions are for installing the pedestal sink to wood frame construction. For other installations, provide suitable bracing and fastening devices of sufficient size and strength.

Check that the walls and floor are square, plumb and level before beginning installation.




CONTENTS

Sink x 1
Pedestal x 1
Assembly kit x 1
 Toggle bolts x 2
 Lag screws x 2
 Lag screw anchors x 2
 Metal washers x 2
 Rubber washers x 2
 Hex nuts x 2
 Floor mounting screws x 2
 Floor anchors x 2

TOOLS REQUIRED



Pencil	Drill
Stud finder	1/8 in. (3.2 mm)
Carpenter's level	Drill bit for stud
Wrench	3/8 in. (9.5 mm)
Hammer	Drill bit for floor mounting screws
Caulking	5/8 in. (15.9 mm)
Safety glasses	Drill bit for sheet rock
Measuring tape	

SPECIFICATIONS

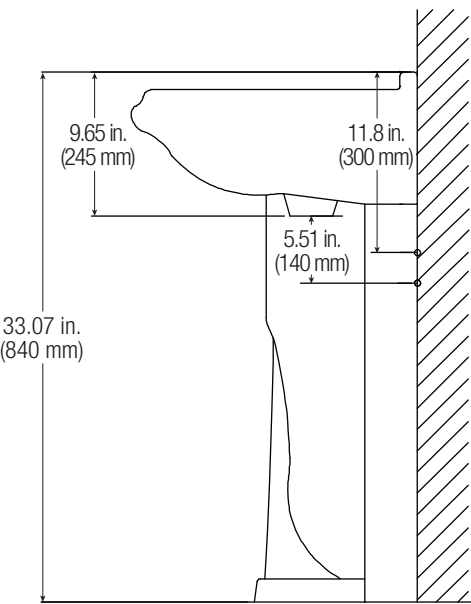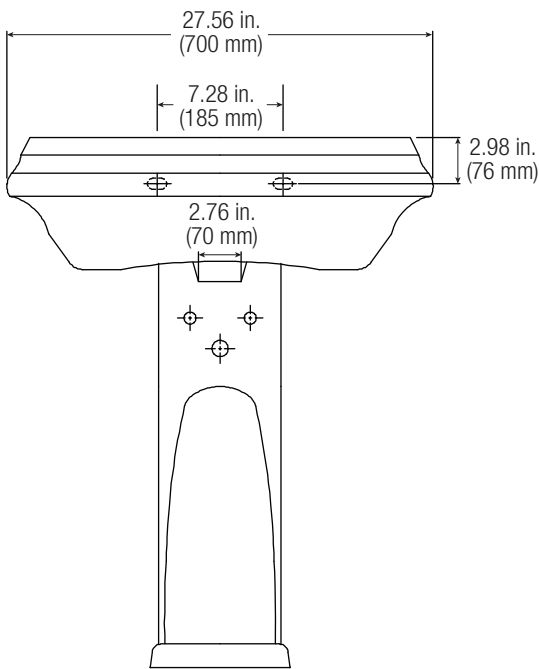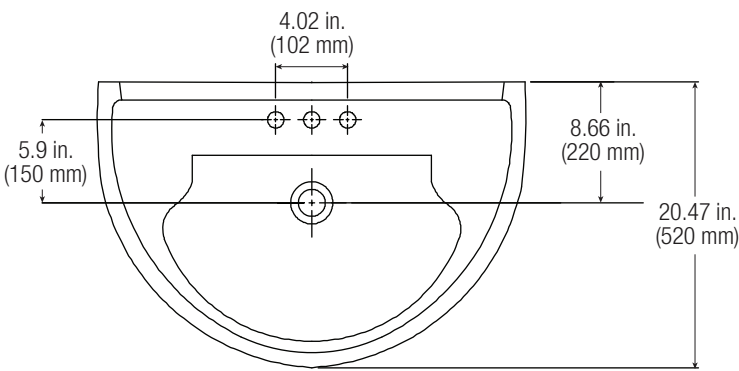

INSTALLATION

1. Choose an appropriate position for the pedestal sink in your bathroom. Make sure that you have access to plumbing and drain fittings. See Fig. 1A and Specifications on page 3.
2. Place the sink on the pedestal and adjust its position against the wall. Make sure the sink is level using a carpenter's level. Mark the wall and floor with a pencil at each mounting hole on the sink and pedestal. See Fig. 1B.
3. Carefully remove the sink and the pedestal from the installation area. Install the faucet and drain assembly to the sink, according to the faucet manufacturer's instructions.
4. Use a 3/8 in. (9.5 mm) drill bit to drill holes into the floor where marked for the pedestal and insert the floor anchors. Place pedestal in place.

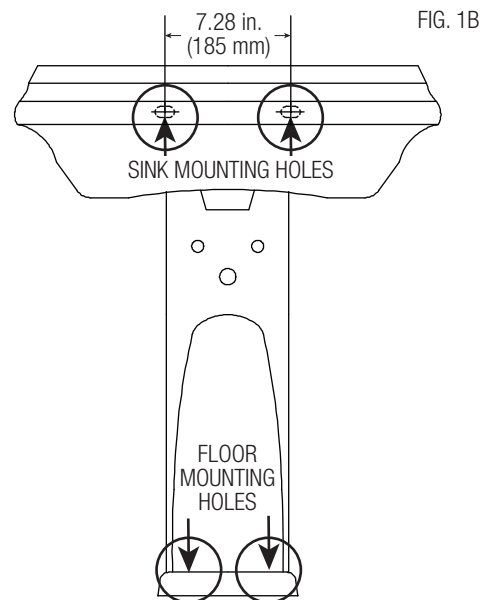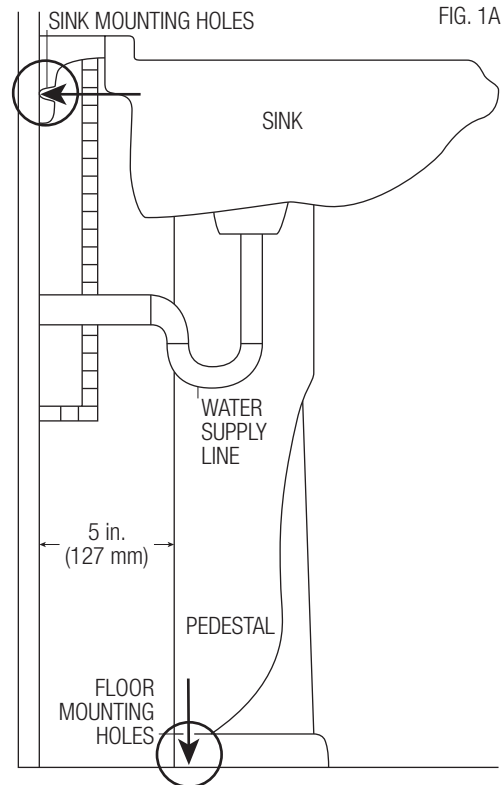

5. Drill holes in the wall where marked, using the appropriate method depending on whether you are drilling into a wall stud or into sheet rock.

DRILLING INTO A WALL STUD

- a. Use a stud finder at the location of the pencil marks to see if there are wall studs before drilling holes into the wall.
- b. If the wall studs are in the correct location: Use a 1/8 in. (3.2 mm) drill bit to drill holes into the studs.

If the wall studs are not in the correct position: Use a 3/8 in. (9.5 mm) drill bit to drill holes into the wall. Insert the lag screw anchors into the holes.

WARNING: The weight of the sink must be stably carried by the pedestal.

- c. Place the sink against the wall, making sure to line up the holes in the sink and the holes in the wall.
- d. Place the metal washer [B], then the rubber washer [C], over the lag screws [A1]. Insert the lag screws through the holes in the sink, then into the holes in the wall. Tighten into the wall wood studs until the sink is snug against the wall. DO NOT OVERTIGHTEN. See Fig. 2A.

DRILLING INTO SHEET ROCK

- a. Use a 5/8 in. (15.9 mm) drill bit to drill holes into the sheet rock as marked.
- b. Place the sink against the wall, making sure to line up the holes in the sink and the holes in the wall.
- c. Insert the toggle bolts [A2] through the holes in the sink and into the holes in the wall. Add the rubber washer [C] and the metal washer [B] over the toggle bolts [A2]. See Fig. 2B.
- d. Place the hex nuts [D] over the toggle bolts [A2] and tighten alternately until the sink is snug against the wall. DO NOT OVERTIGHTEN. See Fig. 2B.

FIG. 2A



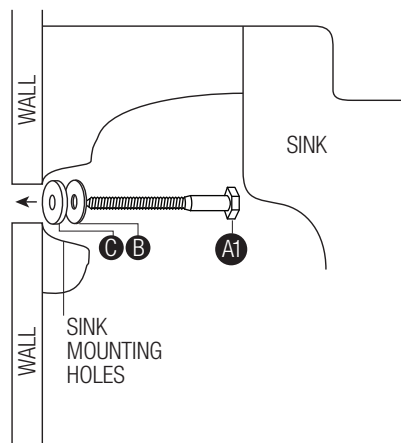



FIG. 2B

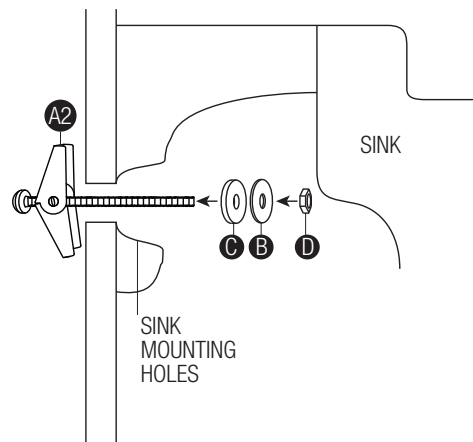

6. Insert the two floor mounting screws [E] into the pedestal base and tighten. See Fig. 3.

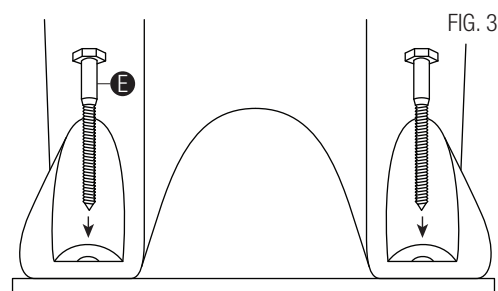

7. Apply a layer of caulking in the area where the sink meets the pedestal, where the pedestal meets the floor and where the sink meets the wall, as shown in Fig. 4. Remove any excess caulking.
8. Complete plumbing connections, as required.

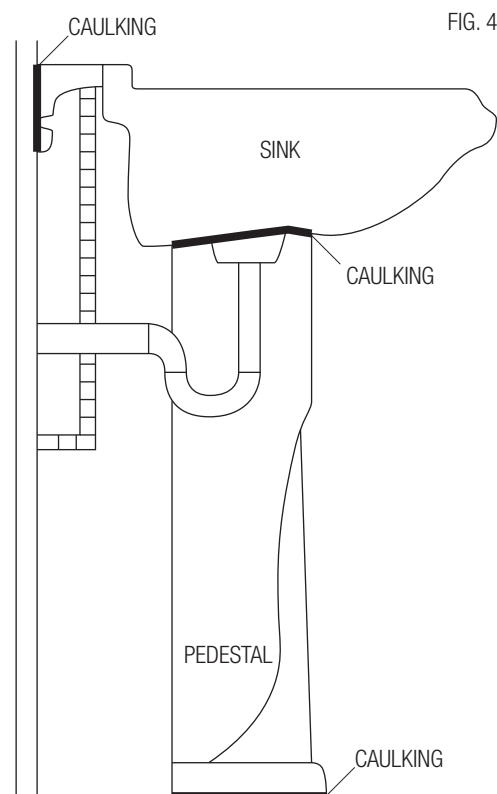

CARE AND CLEANING








For general cleaning, apply a mild, non-abrasive soap and warm water with a soft sponge or cloth. Do not use abrasive cleaners such as cleaners that contain sand or silica, or abrasive materials like brushes or scouring pads, as they will scratch the china surface.

Before using any cleaning product on this unit, carefully read the product label to ensure that the cleaner is safe for use on this material. Always test your cleaning solution on an inconspicuous area before applying to the entire surface.

Wipe surfaces clean and rinse completely with water immediately after cleaner application. Do not allow cleaners to sit or soak on the surface.

REPLACEMENT PARTS

To order replacement parts, please contact our customer service department at 1-800-459-4409 (Monday to Friday, 8:30 am to 5:00 pm, EST) or email us at custsupport@qualitycraft.ca.

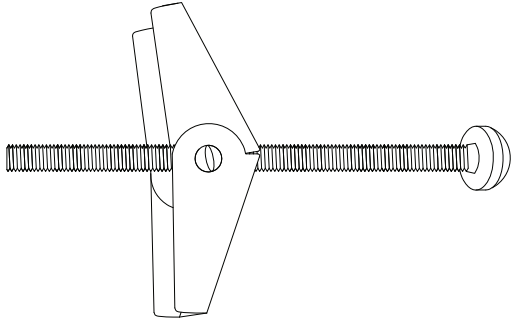PART	PART NUMBER	IMAGE	QTY
ASSEMBLY KIT	SHH001		1
Toggle bolts			2
Lag screws			2
Lag screw anchors			2
Metal washers			2
Rubber washers			2
Hex nuts			2
Floor mounting screws			2
Floor anchors			2

WARRANTY

This product is warranted to the original purchaser to be free of defects in material and workmanship for twenty (20) years from the date of purchase. This non-transferable guarantee applies only to the original purchaser and proof of purchase is required for all claims.

EXCLUSIONS

Any failure of the unit that is not traceable to a defect in material or workmanship is not covered by this warranty. These non-warrantable items include, but are not limited to:

- Damage caused by failure to follow installation instructions
- Alterations made to the product after shipping
- Damage resulting from failure to reasonably clean, care for or maintain the product in accordance with the care and cleaning instructions
- Commercial or institutional use or installation

WARRANTY CLAIM PROCEDURE

If a claimable defect occurs, please fill out a claim form through our website at www.qualitycraft.com or contact our customer service department at 1-800-459-4409 (Monday to Friday, 8:30 am to 5:00 pm, EST).

Before you make your claim call, please make sure you have:

1. The description of the product
2. Proof of sale
3. Details regarding the defect
4. Name and address of the owner and installer

Claims must be filled out in writing and returned within six (6) months of appearance of defect. Failure to comply with this stipulation will make the warranty null and void. We reserve the right to a thirty-day (30) delay following receipt of claim in which to inspect the product. We assume no responsibility for labor costs or removing/replacing a previously installed product or transportation or return of a product.

Imported by:

QualityCraft

Laval, Quebec, Canada H7C 0A5

1-800-459-4409

www.qualitycraft.com

Made in China